

0,2

- 1 275 « »
- 2 7 2000 .
154-
- 3 730-2—79 «
2: I ()» 9191—91 «
»
- 4

0,2

Rear three-point linkage systems for agricultural tractors of traction class 0,2.
Basic parameters and dimensions

2001—07—01

1

(28523). 0,2, (-1), (-0)

2

7463—89

25670—83

28523—90

3

); ():

():

(

)

4

4.1

7463,

1

1.

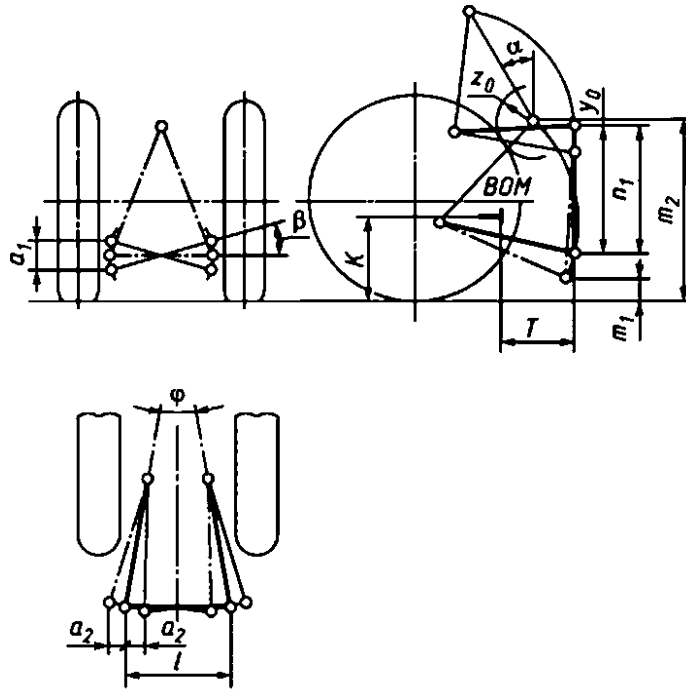


Рисунок 1

1

	-0	-1
	180	200
”	500	600
”	250	400
”	50	75
”	50	50
”	10-15*	10-15*
”	10 *	10 *
”	305	360
”	426	435
”	250-350	300-375
”	250-480	350-550

2

		-0	-1
() ^{2'}		5 *	10
		380	420
		180	200
2)	1.		

4.2

().

4.3

()

4.4

1.

4.5

4.6

q>

15'—20'.

76

4.7

4.8

-0

-1

-0

-1

5

5.1

2

2.

— 25670.

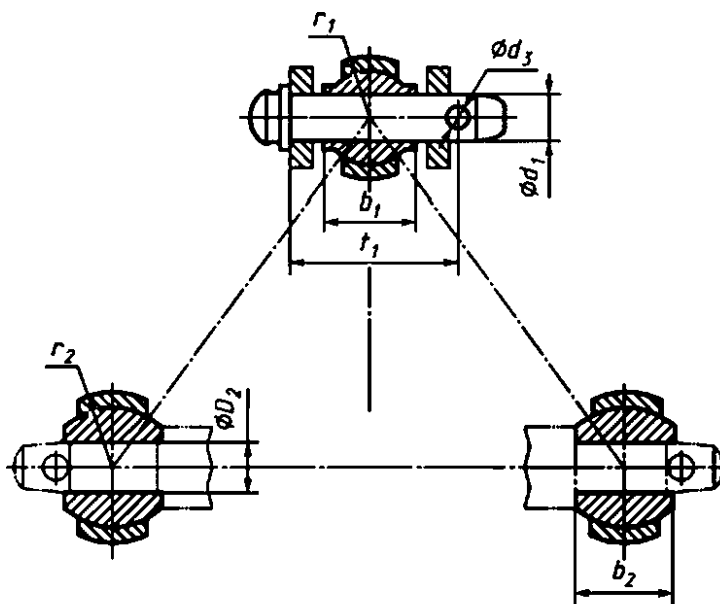


Рисунок 2

	-0	-1
$d_r:$	16.5 16.75 26	18.9 19.0 44
(54	76
$dy,$	8 25	12 28
$D_2:$	17.0 17.25	22.4 22.73
2'	25,8 26 40	34.8 35 43

6

6.1

3

3.

— 25670.

3

		-0	-1
		49	69
	$q.$	27	44.5
		38	45
	$\text{£}>,:$	17.0	19.3
		17.25	19.5
	$d_2:$	16,5	21.8
		16.75	22.0
		30	41
	d_y	8	12
	W	400	400
		305	360
		50	50
1	N		$/-$
2		1.	1.
	3.		

